
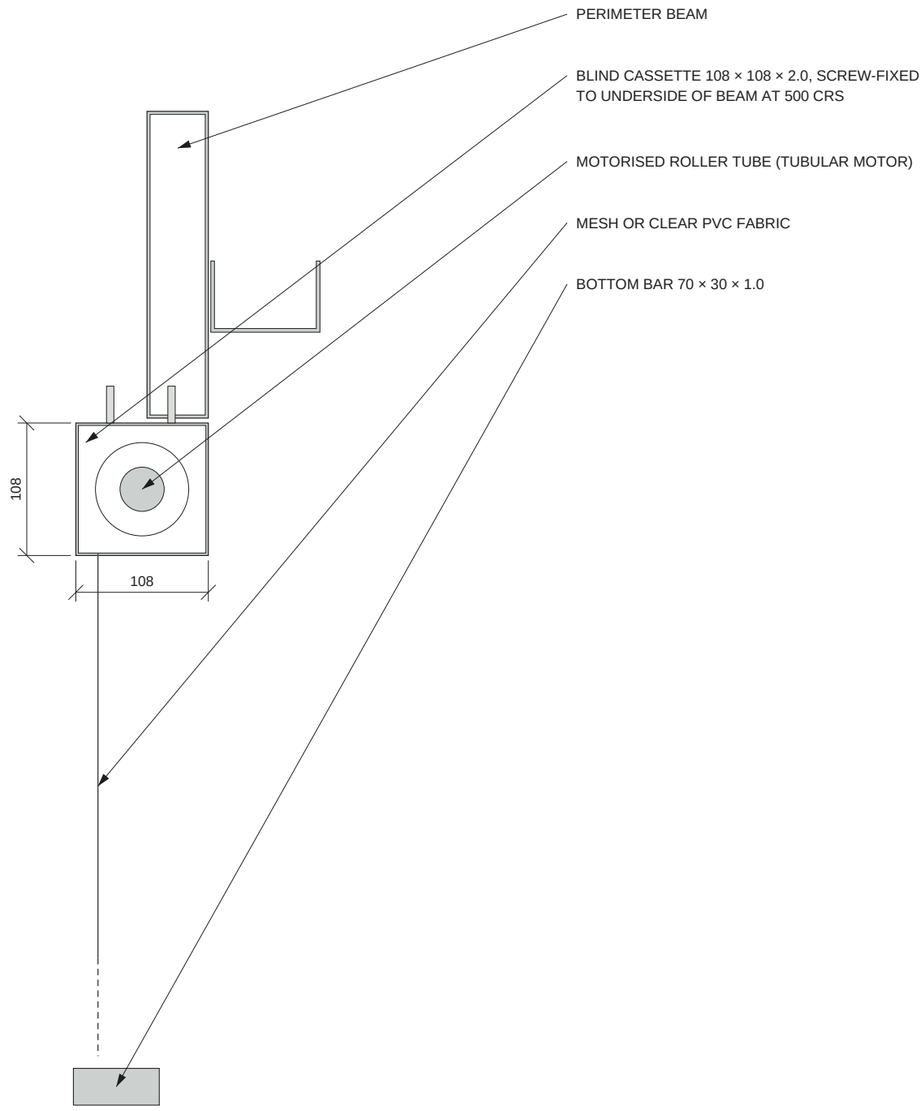


1 **SECTION AT CASSETTE**
1:5

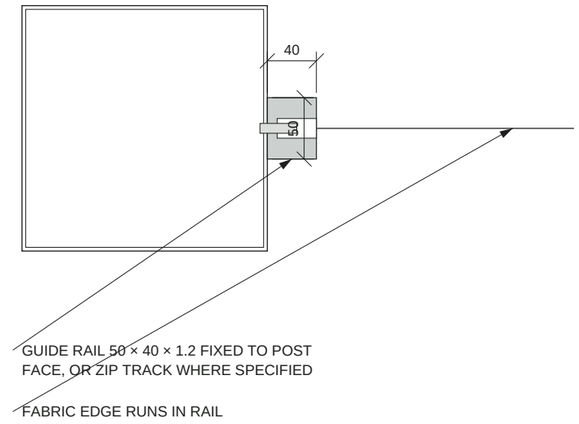

2 **PLAN AT GUIDE RAIL**
1:5

NOTES

1. Blinds fit between posts only, one blind per bay. Max. blind width 4.0 m.
2. Motor power: 230 V supply to each motor or a shared junction box. Electrical work by a registered electrician.
3. Wind sensor raises blinds automatically in strong wind where fitted.
4. Guide rails fixed with stainless screws at max. 500 mm centres.

MOTE
HOME
Louvre roofs, designed and installed

MOTE Home Ltd
171 Glover Road, Hāwera 4610
021 113 5983
hello@motehome.co.nz
motehome.co.nz

DROP-DOWN BLIND: CASSETTE AND GUIDE RAIL

TYPICAL DETAIL. NOT FOR CONSTRUCTION WITHOUT SITE-SPECIFIC ENGINEERING.

Fixings, footings and wind design to be confirmed by a Chartered Professional Engineer for each project.

DWG NO	**MH-TD-08**
SCALE	1:5 @ A3
DATE	13/11/2026

REV
A
Issued for information

© MOTE Home Ltd